


**Specific Features:** 

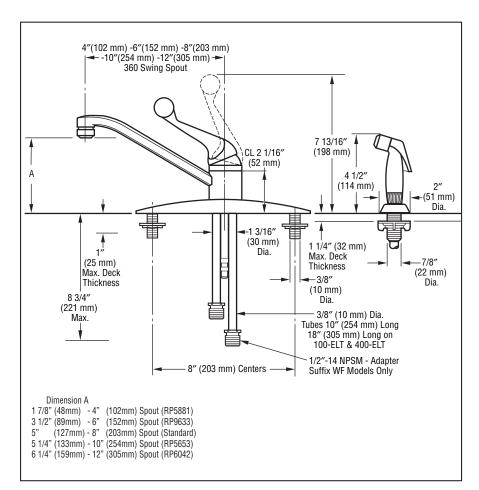

# **O**DELTA

# KITCHEN FAUCETS

- Classic Series
- Single Handle Deck Mount
- 3 and 4 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- Standard 8" (203 mm) long spout swings 360°.
- 10" (254mm) long spout swings 360°. Standard on models 100-WF10, 110-WF10 and 400-10.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle shall return to neutral position when valve is turned off.
- Model 400 series with spray attachment has antisiphon device as integral part of valve body.
- Model 100, 110 and 400 series without dispenser can be field converted from 8" (203 mm) to 6" (152 mm) centers.
- Quick Snap<sup>®</sup> vegetable sprayer hose with white sprayhead on model 400 series - 45" (1143mm) long hose.
- 3/8" O.D. copper tube inlets 10" (854mm) long.
- Models with suffix "WF" supplied with 1/2"-14 NPSM adapters.
- Model 400-ELT has 18" (457mm) extra long supply tubes.
- Model 110-WF10 ships with 360° swivel spray aerator (RP2189).

#### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- NSF 61

Indicates ADA compliance to ICC/ANSI A117.1


- IAPMO Listed
- CSA Certified











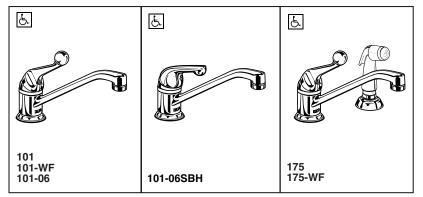

Submitted Model No.: \_\_\_\_\_\_\_Specific Features:

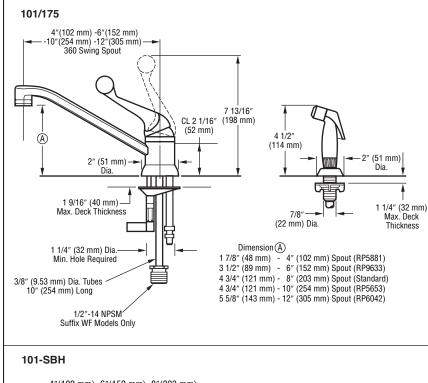

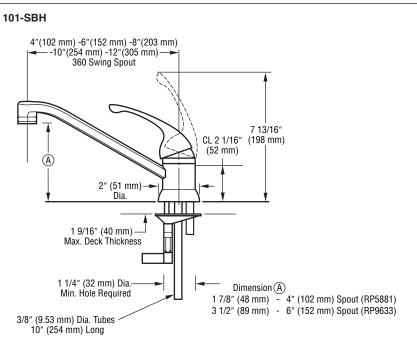

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

### **O**DELTA.

### KITCHEN FAUCETS

- Classic Series
- Single Handle Deck Mount
- Single and 2 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Model 175 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- Standard 8" (203 mm) long spout swings 360°.
- 6" (152mm) long spout swings 360°. Standard on models 101-06 and 101-06SBH.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle shall return to neutral position when valve is turned off.
- Model 175 series with spray attachment has antisiphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose with white sprayhead on model 175 series - 45" (1143mm) long hose.
- 3/8" O.D. copper tube inlets.
- Models with suffix "WF" supplied with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- NSF 61
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified











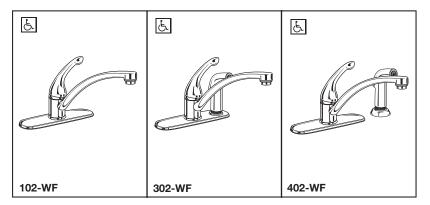

**Specific Features:** 

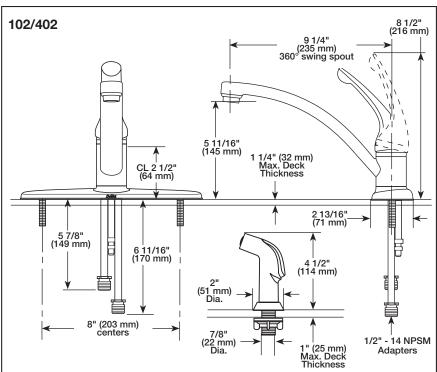

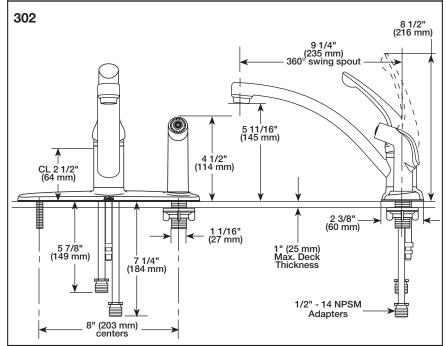

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-K-102 Rev. A

# **O**DELTA.

### KITCHEN FAUCETS

- Sincerity<sup>™</sup> Series
- Single Handle Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Models 302 and 402 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9 1/4" (235 mm) long spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Models 302 and 402 series with spray attachment have anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose with matching finish sprayhead on models 302 and 402 series -45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper supply tubes
   5 7/8" (149 mm) and 6 11/16" (170 mm) long supplied with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified












Specific Features:

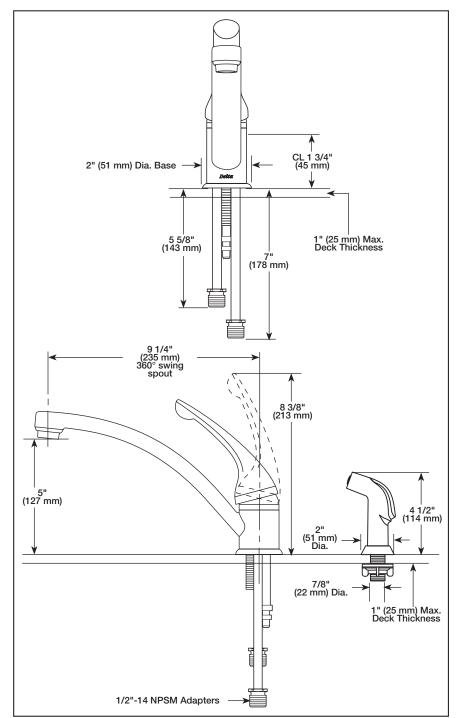

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### KITCHEN FAUCETS

- Sincerity<sup>™</sup> Series
- Single Handle Deck Mount
- Single and 2 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Model 403 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9 1/4" (235 mm) long spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Model 403 series with spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose with matching finish sprayhead on model 403 series - 45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper supply tubes - 5 5/8" (143 mm) and 7" (178 mm) long supplied with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- 国 Indicates ADA compliance to
- ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified












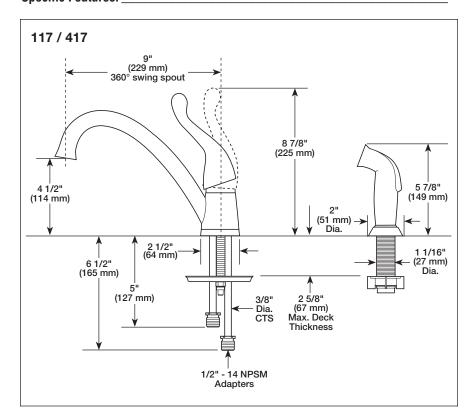

# **DELTA**

### KITCHEN FAUCETS

- Talbott<sup>™</sup> Series
- Single Handle Deck Mount
- 1 and 2 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Model 417 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9" (229 mm) long spout swings 360°.
- Lever handle shall return to neutral position when valve is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable nonmetallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Model 417 series with spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose installation on model 417 series.
- 3/8" O.D. straight, staggered copper supply tubes - 4 1/2" (114 mm) and 6" (152 mm) long supplied with 1/2"-14 NPSM adapters.


#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.


- ASME A112.18.1/CSA B125.1
- ANSI/NSF61 Section 9
   Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified











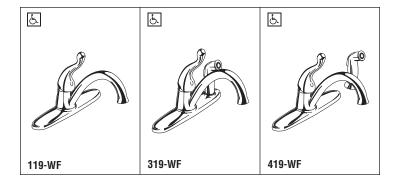

**Specific Features:** 

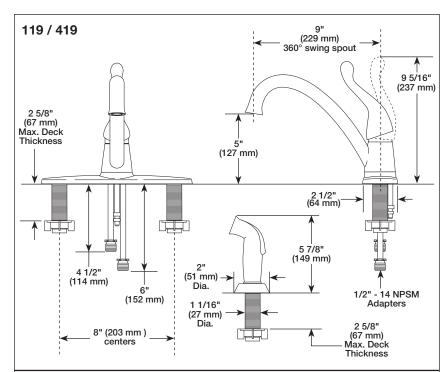

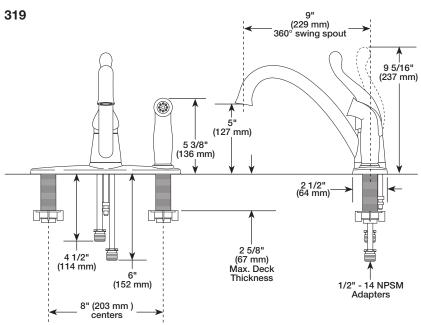

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### KITCHEN FAUCETS

- Talbott<sup>TM</sup> Series
- Single Handle Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Models 319 and 419 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9" (229 mm) long spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature
- Models 319 and 419 series with spray attachment have anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose with matching finish sprayhead on models 319 and 419 series - 45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper supply tubes - 4 1/2" (114 mm) and 6" (152 mm) long supplied with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1/CSA B125.1
  Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified












Submitted Model No.: \_ **Specific Features:** 

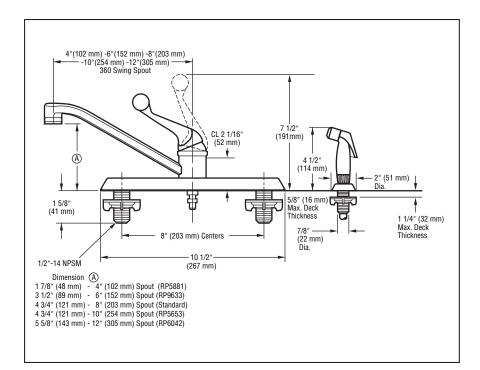

# 

### KITCHEN **FAUCETS**

- Classic Series
- Single Handle Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Model 420 Series

#### STANDARD SPECIFICATIONS:

- Single handle kitchen deck faucets for mounting on three and four hole sinks.
- Solid brass fabricated body.
- Standard 8" (203 mm) long spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined
- Control handle shall return to neutral position when valve is turned off.
- 1/2"-14 NPSM threaded male inlet shanks.
- Model 420 series with spray attachment has antisiphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose with white sprayhead on model 420 series - 45" (1143mm) long hose.


#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

- ASME A112.18.1 / CSA B125.1
- NSF 61
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed CSA Certified

















Specific Features:

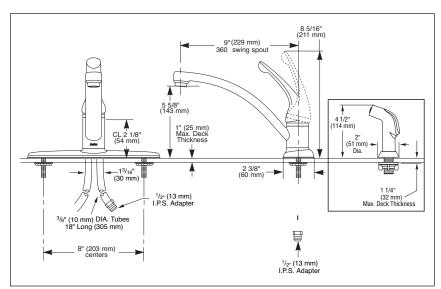

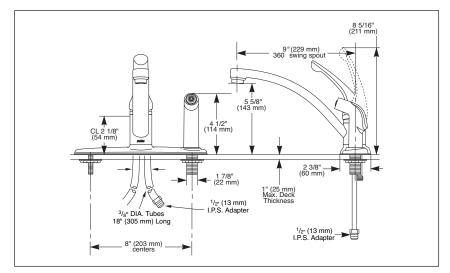

# **O**DELTA.

### KITCHEN FAUCETS

- Single Handle Deck Mount
- 3 and 4 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- Standard 9" (228 mm) long spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle shall return to neutral position when valve is turned off.
- Model 335/435 with spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose with chrome sprayhead on model 335/435 - 45" (1143mm) long hose.
- STP models 3/8" O.D. copper tube inlets
   18" (457mm) long.
- Models with suffix "WF" supplied with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1/CSA B125.1
- NSF 61
- Landicates ADA compliance to ICC/ANSI A117.1
- CSA Certified











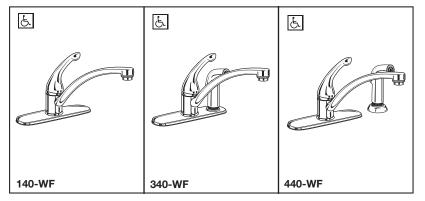

**Specific Features:** 

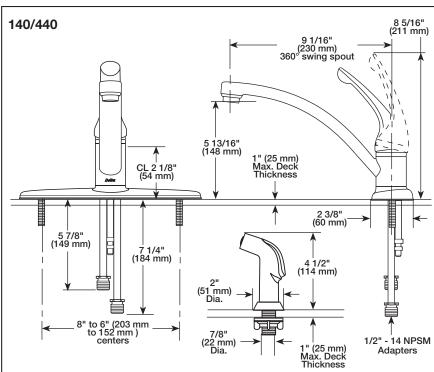

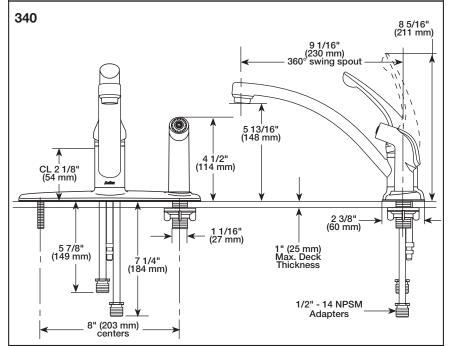

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### KITCHEN FAUCETS

- Signature<sup>®</sup> Series
- Single Handle Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Models 340 and 440 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9 1/16" (230 mm) long spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Models 340 and 440 series with spray attachment have anti-siphon device as integral part of valve body.
- Models 140 and 440 series can be field converted from 8" (203 mm) to 6" (152 mm) centers. RP288 mounting bolts available separately.
- Quick Snap® vegetable sprayer hose with matching finish sprayhead on models 340 and 440 series -45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper supply tubes
   5 7/8" (149 mm) and 7 1/4" (184 mm) long supplied with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- ICC/ANSI A117. ■ IAPMO Listed
- CSA Certified








4 D 9




55 E. 111th Street, Indianapolis, IN 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2007 Masco Corporation of Indiana

DSP-K-140 Rev. E



Specific Features:

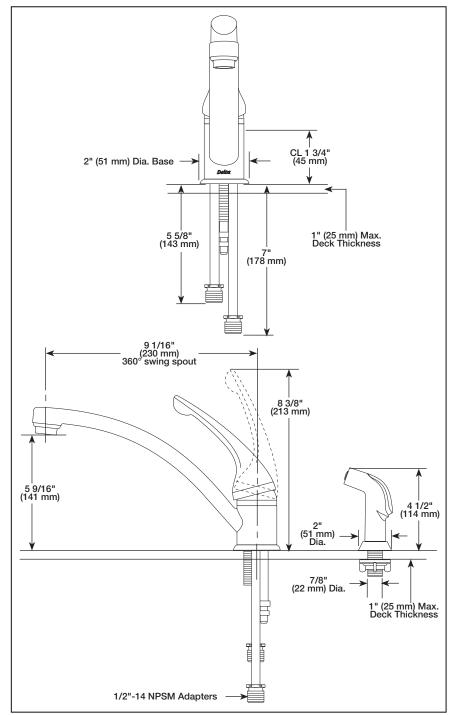

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### KITCHEN FAUCETS

- Signature® Series
- Single Handle Deck Mount
- Single and 2 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Model 441 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9 1/16" (230 mm) long spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Model 441 series with spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap<sup>®</sup> vegetable sprayer hose with matching finish sprayhead on model 441 series - 45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper supply tubes - 5 5/8" (143 mm) and 7" (178 mm) long supplied with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified












Submitted Model No.: \_ **Specific Features:** 

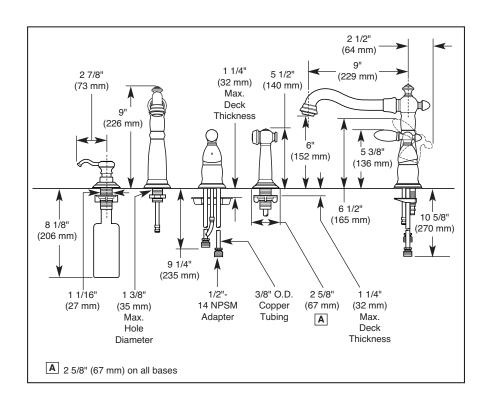

# 

### KITCHEN FAUCETS

- Victorian® Series
- Single Handle Widespread Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9" (229 mm) long, spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined
- Control handle shall return to neutral position when valve is turned off.
- Spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap® hose installation.
- Vegetable sprayer with matching finish sprayhead - 45" (1143mm) long hose.
- 3/8" O.D. straight, staggered coper tube inlets 9 1/4" (235mm) and 10 5/8" (270mm) long with 1/2"-14 NPSM adapters.
- Standard mounting deck thickness 1 1/4" can be extended 1" with RP37776 thick tile mounting kit.

#### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1

Indicates ADA compliance to ICC/ANSI A117.1


- IAPMO Listed
- CSA Certified












**Specific Features:** 

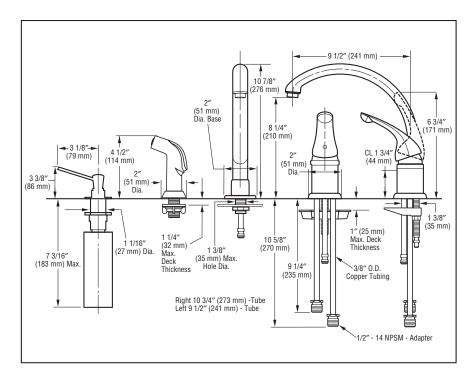

# **O**DELTA.

### KITCHEN FAUCETS

- Waterfall® Series
- Single Handle Widespread Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9 1/2" (241 mm) long, 10 7/8" (276 mm) high spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets
- Control handle shall return to neutral position when valve is turned off.
- Model 172 and 174 series with spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap® hose installation.
- Vegetable sprayer with matching finish sprayhead - 45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper tube inlets
   9 1/2" (241mm) and 10 3/4" (273mm) long with 1/2"-14 NPSM adapters.
- Recommended hole sizes 1 3/8" (35 mm) on 4" (102 mm) centers.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified













**Specific Features:** 

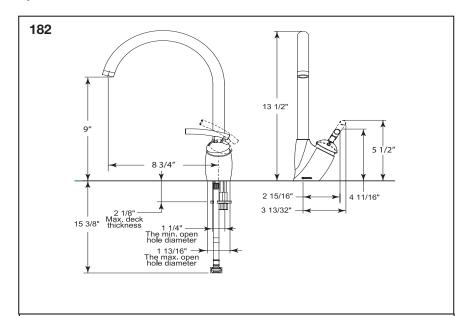

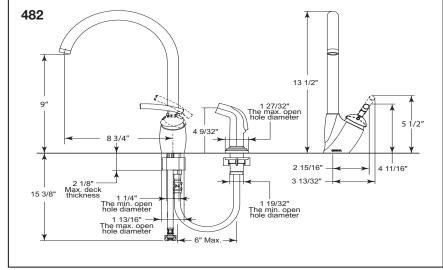

# 

### KITCHEN FAUCETS

- Urban Loft Verona<sup>™</sup> Series
- Single Handle Deck Mount
- 1 and 2 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Model 482 Series

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 8 27/32" (225 mm) long spout swings 360°.
- Ceramic valve cartridge.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Model 482 series with spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose installation on model 482 series.
- Flexible supply lines 15 3/8 " (390.5 mm) long included with 1/2"-14 NPSM adapters.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

- ASME A112.18.1 / CSA B125.1
- NSF61 Section 9
- Indicates Aur. Co. ICC/ANSI A117.1 Indicates ADA compliance to
- IAPMO Listed
- CSA Certified










**Specific Features:** 

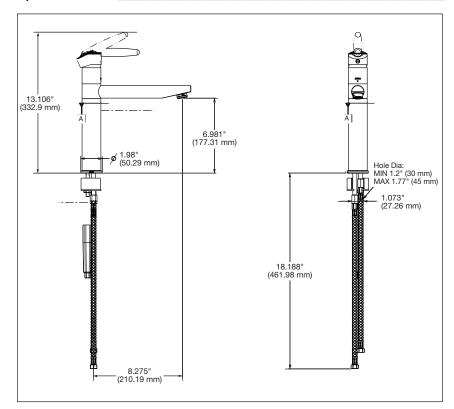

# **O**DELTA.

### KITCHEN FAUCETS

- Grail<sup>TM</sup> Series
- Single Handle
- Deck Mount
- 1 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Single handle kitchen faucet.
- Ceramic cartridge.
- 1 hole installation.
- 8.275" (210 mm) long reach on spout.
- Maximum 1.890" (48 mm) deck thickness.
- Colour coded plug button on handle for hot/cold identification.

#### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

- CSA Certified
- Complies to ANSI/ASME Standard A112.18 1M
- ADA Compliant and meets Handicapped Accessibility. Standards ICC/ANSI 117.1
- NSF 61










Submitted Model No.: \_ **Specific Features:** 

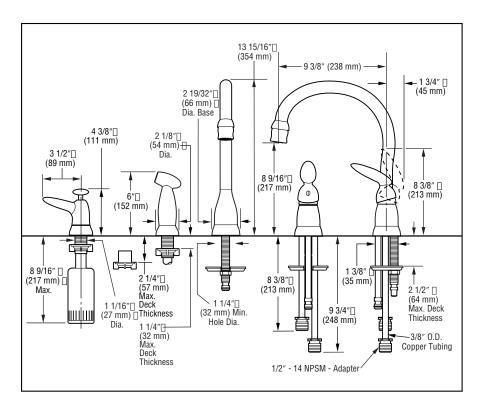

# 

### KITCHEN FAUCETS

- The Michael Graves Collection™
- Single Handle Widespread Deck Mount
- 3 and 4 Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 9 3/8" (238 mm) long, 13 15/16" (354 mm) high spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable nonmetallic seats operating in stainless steel lined sockets.
- Control handle shall return to neutral position when valve is turned off.
- Model 186 and 187 series with spray attachment has anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose with matching finish sprayhead on model 186 and 187 series 45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper tube inlets 9 1/2" (241mm) and 10 3/4" (273mm) long with 1/2" NPSM adapters.
- Recommended hole sizes 1 3/8" (35 mm) on 4" (102 mm) centers.
- Dual function, swivel head aerator.


#### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.


- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed CSA Certified
- NSF 61













**Specific Features:** 

4.D.16

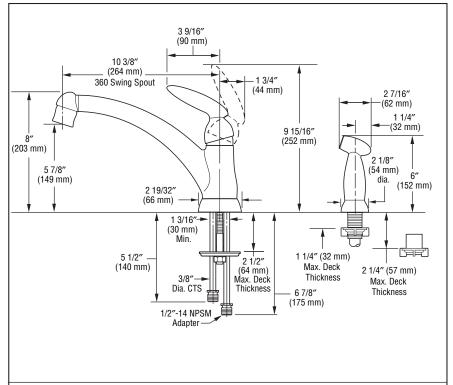

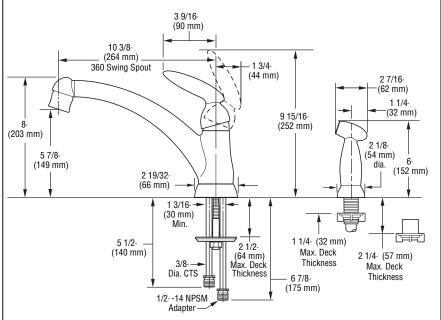

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### KITCHEN FAUCETS

- The Michael Graves Collection™
- Single Handle Deck Mount
- 1, 2, 3 and 4 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation on Model 488

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- Centermount or 8" (203 mm) centers with optional included 11" (279 mm) long escutcheon.
- 10 3/8" (264 mm) long spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Control handle shall return to neutral position when valve is turned off.
- Model 488 with spray attachment has anti-siphon device as integral part of valve body.
- Dual function, swivel head aerator.
- Model 188 and 488 series can be field converted from 8" to 6" centers.
- Quick Snap® vegetable sprayer hose with matching finish sprayhead on model 488 - 45" (1143mm) long hose.
- 3/8" O.D. straight, staggered copper tube inlets - 5 1/2" [140mm] & 6 7/8" [175mm] long with 1/2"-14 NPSM adapters.

#### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified
- Complies with NSF61 Section 9












**Specific Features:** 

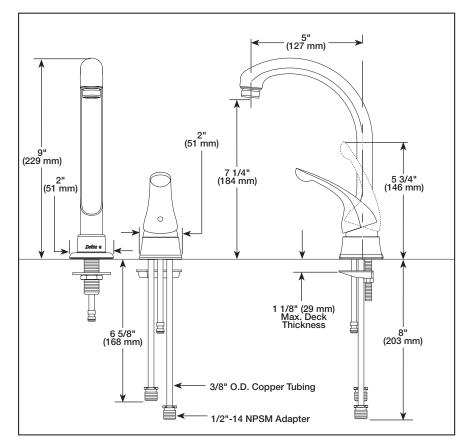

# 

### BAR & PREP SINK FAUCETS

- Waterfall® Series
- Single Handle Widespread Deck Mount
- Two Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Solid fabricated brass body.
- 5" (127 mm) long, 9" (229 mm) high spout swings 360°
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle to indicate hot/cold temperature.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Quick Snap® hose installation.
- 3/8" O.D. straight, staggered copper supply tubes - 6 5/8" (168 mm) and 8" (203 mm) long - with 1/2"-14 NPSM adapters.
- Requires minimum 1 1/2" (38 mm) diameter hole.
- Thick deck mounting kit for 2 1/2" (64mm) max. deck thickness available as RP32638.

#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- NSF 61

Indicates ADA compliance to ICC/ANSI A117.1


- IAPMO Listed
- CSA Certified












**Specific Features:** 

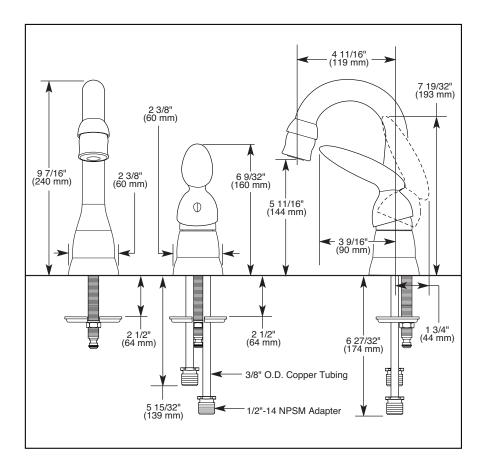

# **DELTA**

### BAR & PREP SINK FAUCETS

- The Michael Graves Collection™
- Single Handle Widespread Deck Mount
- Two Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Solid fabricated brass body.
- 4 11/16" (119 mm) long, 9 7/16" (240 mm) highspout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle to indicate hot/cold temperature.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Dual function, swivel head aerator.
- Quick Snap® hose installation.
- 3/8" O.D. straight, staggered copper supply tubes 5 15/32" (139 mm) and 6 27/32" (174 mm) long with 1/2"-14 NPSM adapters.
- Requires minimum 1 1/4" (32 mm) diameter hole.

#### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- NSF 61
- Indicates ADA compliance to
  - ICC/ANSI A117.1
    IAPMO Listed
- CSA Certified











Submitted Model No.: \_\_\_\_\_\_\_Specific Features: \_\_\_\_\_\_

# 10 5/8" (270 mm) 8" (203 mm) Centers +/- 1/4" (6 mm) 9 5/8″∏ (244 mm) 4"(102 mm) -6"(152 mm) -8"(203 mm) -10"(254 mm) → -12"(305 mm) 1 1/4" (32 mm) 8 1/16" (205 mm) 1 1/8" (29 mm) 5 5/8" (143 mm) 1/2" - 14 NPSM FEMALE

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### KITCHEN FAUCETS

- Classic Series
- Single Handle Wall Mount
- 8" Centers

#### **STANDARD SPECIFICATIONS:**

- Single handle kitchen faucets for wall mounting.
- Solid brass fabricated body.
- 8" (203 mm) long spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle shall return to neutral position when valve is turned off.
- 1/2"-14 NPSM female threaded inlet adapters.

#### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- NSF 61

Indicates ADA compliance to ICC/ANSI A117.1


- IAPMO Listed
- CSA Certified










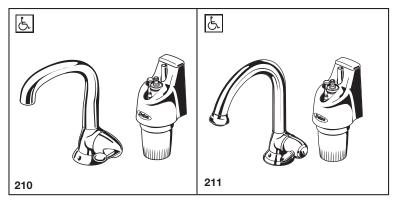

3.8" (97 mm)

Delta

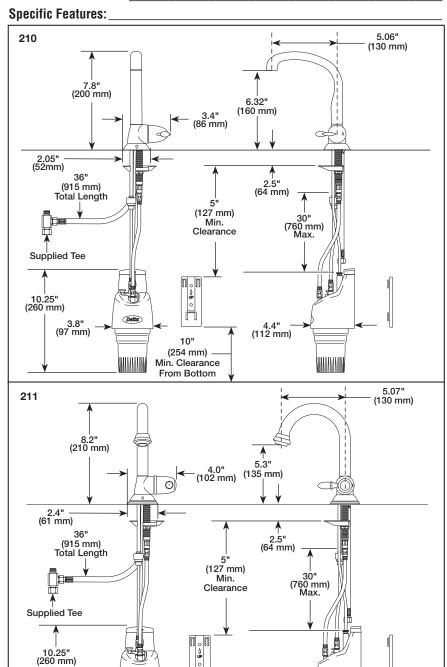

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.
4.D.20

10" (254 mm) — Min. Clearance

From Bottom

4.4" (112 mm)

# **O**DELTA.

# WATER FILTRATION SYSTEM

- Simply PŪR®
- Single Handle Side Faucet
- Single Hole Deck Mount
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 210 7.8" (200 mm) high, 5.06" (130 mm) long, swings 180°.
   211 8.2" (210 mm) high, 5.07" (130 mm) long, swings 360°.
- Quick Snap® hose(s) & tube(s) installation.
- Visual indicator using light pipe indicates filter status.
- All fittings supplied ready to install.
- Standard 3/8" compression tee.
- Easy filter cartridge replacement.
- Operates using 2 AA batteries (supplied) long life (more than 1 year).
- Under sink filtration system should be mounted within 30" from the faucet.
- Maximum mounting thickness is 2.5" (64 mm).
- Minimum mounting hole size is 1.1" (28 mm).
- Must only be connected to the cold water supply.
- Uses only PUR<sup>®</sup> blue faucet mount filters.
- See owners manual for performance data sheet filter contaminant removal data.

#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- NSF 42 & 53
- ASME A112.18.1 / CSA B125.1

Indicates ADA compliance to ICC/ANSI A117.1


EPA Establishment Number 081771-IN-001




Drinking Water







Specific Features:

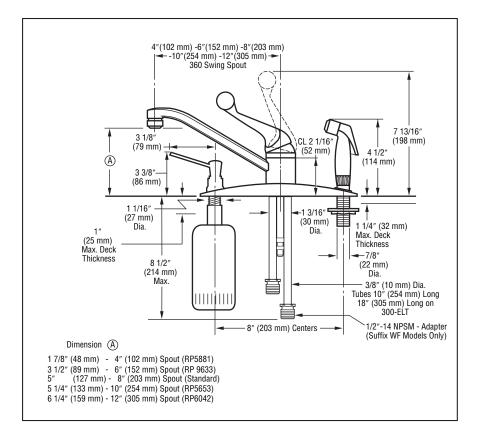

# **ODELTA**

### KITCHEN FAUCETS

- Classic Series
- Single Handle Deck Mount
- 3 Hole Sink Applications
- Quick Snap® Vegetable Sprayer Hose Installation

#### STANDARD SPECIFICATIONS:

- Solid brass fabricated body.
- 8" (203 mm) long spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless
- Control handle shall return to neutral position when valve is turned off.
- Quick Snap® vegetable sprayer hose installation.
- Anti-siphon device as integral part of valve body.
- Models with suffix "WF" supplied with 1/2"-14 NPSM adapters.

#### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- NSF 61

Indicates ADA compliance to ICC/ANSI A117.1


- IAPMO Listed
- CSA Certified













**Specific Features:** 

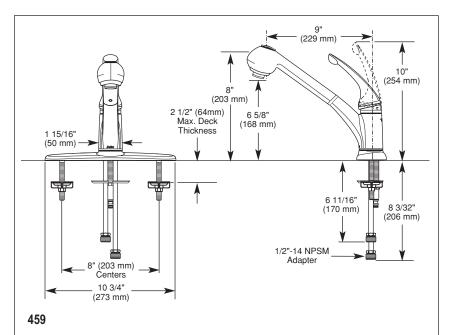

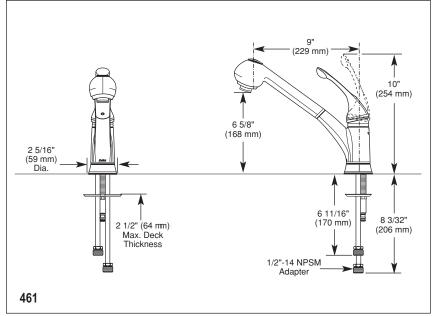

# **O**DELTA

### KITCHEN FAUCETS

- Pull-Out Spray
- Single Handle
- Deck Mount
- Single or 3 Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Single handle kitchen faucets for exposed mounting on single and three hold sinks.
- Centermount or 8" (203 mm) centers with optional included 10 3/4" (273 mm) long escutcheon.
- Solid brass fabricated body.
- 8" (203 mm) high, 9" (229 mm) long spout (includes 6 1/4" (159 mm) long pull-out spray) nestled in all brass hub assembly, swings 120°.
- Pull-out spout operates in an aerated or spray mode.
- Touch-Clean® sprayhead.
- Quick Snap® hose installation.
- Spout is connected to valve body with a 60" (1524 mm) long hose that extends to 38" (965 mm) usable length.
- Lever handle shall return to neutral when faucet is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue indicator on handle button to indicate hot/cold temperature.
- 3/8" O.D. straight, staggered copper supply tubes
   6 11/16" (170 mm) and 8 3/32" (206 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Double check stops are contained within the spout.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- <u>AS</u>ME A112.18.1/CSA B125
- Landicates ADA compliance to CABO/ANSI A117.1
- IAPMO Listed
- CSA Certified
- NSF 61












Specific Features:

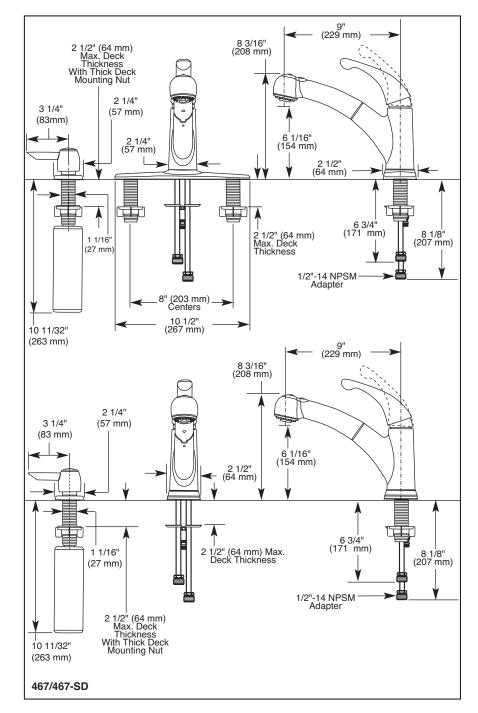

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# 

### KITCHEN FAUCETS

- Palo<sup>™</sup> Pull-Out Sprav Series
- Single Handle Deck Mount
- 1,2,3 or 4 Hole Sink Applications

#### STANDARD SPECIFICATIONS:


- Solid brass fabricated body.
- Centermount or 8" (203 mm) centers with optional included 10 1/2" (267 mm) long escutcheon.
- Single handle kitchen faucets for exposed mounting on 1, 2. 3. or 4 hole sinks.
- 8 3/16" (208 mm) high, 9" (229 mm) long spout nestled in metal hub, swings 120°.
- Pull-out spout operates in an aerated or spray mode via an easy push button.
- Touch-Clean® sprayhead.
- Quick Snap® hose installation.
- Spout is connected to valve body with a 59" (1524 mm) long hose that extends to 38" (965 mm) usable length.
- Lever handle shall return to neutral position when faucet is turned off
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- 3/8" O.D. straight, staggered copper supply tubes 6 3/4" (171 mm) and 8 1/8" (207 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Integral double check valves in spout.

#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**

■ ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to




■ IAPMO Listed


CSA Certified













**Specific Features:** 

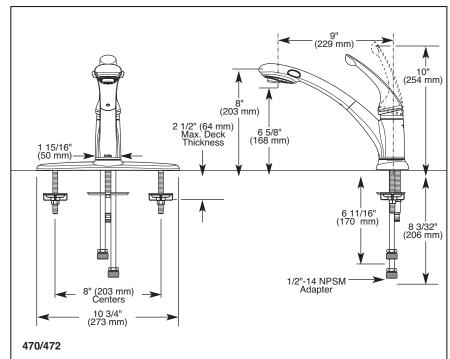

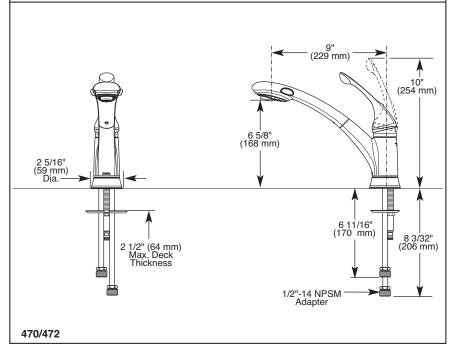

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### KITCHEN FAUCETS

- Signature® Pull-Out Series
- Single Handle Deck Mount
- Single or 3 Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Single handle kitchen faucets for exposed mounting on single and three hole sinks.
- Solid brass fabricated body.
- Centermount or 8" (203 mm) centers with optional included 10 3/4" (273 mm) long escutcheon.
- 8" (203 mm) high, 9" (229 mm) long spout [includes 6 1/4 (159 mm) long pull-out spray] nestled in all brass hub assembly, swings 120°.
- Spout is connected to valve body with a 60" (1524 mm) long hose that extends to 38" (965 mm) usable length.
- Pull-out spout operates in an aerated or spray mode via an easy side-to-side push lever.
- Lever or loop handle shall return to neutral position when faucet is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Quick Snap®hose installation.
- Touch-Clean® sprayhead.
- 3/8" O.D. straight, staggered copper supply tubes 6 11/16" (170 mm) and 8 3/32" (206 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Integral double check valves in spout.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified












Submitted Model No.: \_\_\_\_\_\_\_Specific Features: \_\_\_\_\_\_

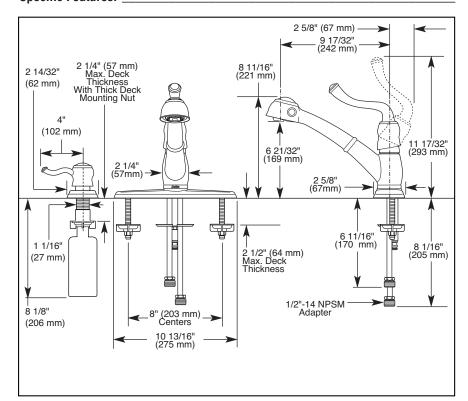

# **O**DELTA

### KITCHEN FAUCETS

- Saxony<sup>™</sup> Pull-Out Series
- Single Handle Deck Mount
- 1,2,3 or 4 Hole Sink Applications
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Single handle kitchen faucets for exposed mounting on 1, 2, 3, or 4 hole sinks.
- Solid brass fabricated body.
- Centermount or 8" (203 mm) centers with optional included 10 13/16" (275 mm) long escutcheon.
- 8 11/16" (221 mm) high, 9 17/32" (242 mm) long spout [includes 6 15/32" (164 mm) long pull-out spray] nestled in all brass hub assembly, swings 120°
- Spout is connected to valve body with a 59" (1524 mm) long hose that extends to 38" (965 mm) usable length.
- Pull-out spout operates in an aerated or spray mode via an easy side-to-side push lever.
- Lever handle shall return to neutral position when faucet is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Quick Snap® hose installation.
- Touch-Clean® sprayhead.
- 3/8" O.D. straight, staggered copper supply tubes 6 11/16" (170 mm) and 8 3/32" (206 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Integral double check valves in spout.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
  - ICC/ANSI A117.
     IAPMO Listed
- CSA Certified













Specific Features:

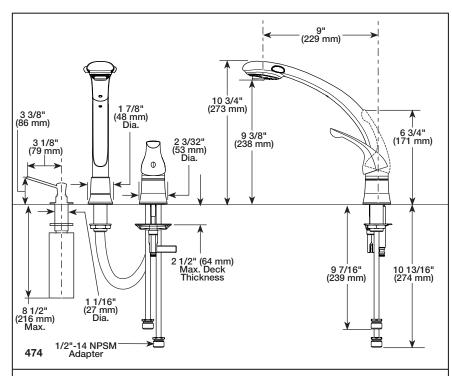

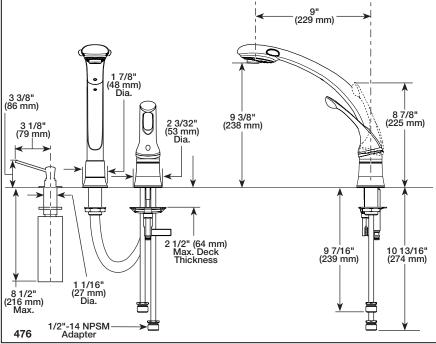

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability. 4.D.26

# **DELTA**

### KITCHEN FAUCETS

- Waterfall<sup>®</sup> Pull-Out Series
- Single Handle Widespread Deck Mount
- 3 Hole Sink Applications Quick Snap® Hose Installation

#### STANDARD SPECIFICATIONS:

- Solid fabricated brass body.
- 10 3/4" (273 mm) high, 9" (229 mm) long [includes 6 1/4" (159 mm) long pull-out spray] nestled in all brass hub assembly, swings 360°.
- Spout is connected to valve body with a 60" (1524 mm) long hose that extends to 38" (965 mm) usable length.
- Pull-out spout operates in an aerated or spray mode via an easy side-to-side push lever.
- Lever or loop handle shall return to neutral position when faucet is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Quick Snap<sup>®</sup> hose installation.
- Touch-Clean® sprayhead.
- 3/8" O.D. straight, staggered copper supply tubes 9 7/16" (240 mm) and 10 13/16" (275 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Soap/lotion dispenser.
- 2 1/2" (64 mm) thick deck installation capability.
- Integral double check valves in spout.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified












Submitted Model No.: \_\_\_\_\_\_\_\_
Specific Features:

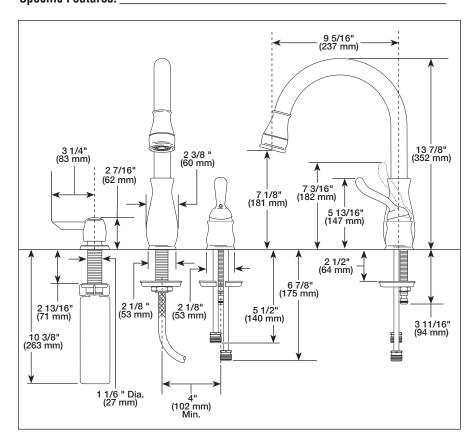

# **O**DELTA

### KITCHEN FAUCETS

- Leland<sup>TM</sup> Collection
- Single Handle Deck Mount
- 2-Function Pull-Down
- 2 or 3 Hole Sink Applications
- Optional Soap Dispenser
- Quick Snap® Hose Installation

#### **STANDARD SPECIFICATIONS:**

- Single handle, 2-function pull-down kitchen faucets for exposed mounting on two and three hole sinks.
- Solid brass fabricated body.
- 13 7/8" (352 mm) high, 9 5/16" (237 mm) long, spout swings 360°.
- Lever handle. Control mechanism is rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control shall return to neutral position when faucet is turned off.
- Quick Snap® connect hoses.
- Pull-down wand operates in an aerated or spray mode via a twist activated diverter.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Twist and lock mechanism eliminates spray head wobble.
- Integral double check valves in sprayer assembly.
- Disposable hose lead to aid installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Recommended hole size 1 3/8" (35mm) on 4" (102mm) centers.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**

ASME A112.18.1/CSA B125.1
Lindicates ADA compliance to ICC/ANSI A117.1











-10.12"-(257 mm)



Submitted Model No.:

# **Specific Features:** 4.1" (104 mm CLOSED 15.4" (391 mm) 6.68" 7.7" (170 mm) (197 mm) OPEN CLOSED 3.8" (96.5 mm) 3.8" (96.5 mm) FULL HOT 2.4"— (61 mm) 6.7" (170 mm) 1/2" - 14 NPSM Adapte

#### Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability. 4.D.28

# **O**DELTA.

### KITCHEN FAUCETS

- Grail<sup>™</sup> Pulldown Kitchen Faucet
- Single Handle Deck Mount

#### STANDARD SPECIFICATIONS:

- Solid brass fabricated body.
- Single hole mount.
- 8" centres with optional 10-1/8" long escutcheon (RP48358).
- Single handle kitchen faucet for exposed mounting on 1 or 3 hole sinks.
- 15.4" (391 mm) high, 8.4" (213 mm) long spout nestled in a metal hub, swings 120°
- Pulldown spout operates in an aerated or spray mode via an easy push button.
- Touch-Clean® sprayhead.
- Quick Snap® hose installation.
- Spout is connected to valve body with a 59" (1499 mm) long hose that extends to 23" (584 mm) usable length.
- Ceramic cartridge.
- 3/8" O.D. straight, staggered copper supply tubes - 6-11/16" (170 mm) and 8-3/32' (205 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Integral double check valves in spray head.

#### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1/CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified
- NSF 61










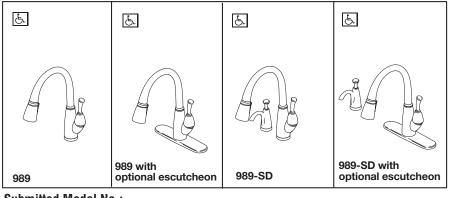

#### Specific Features:

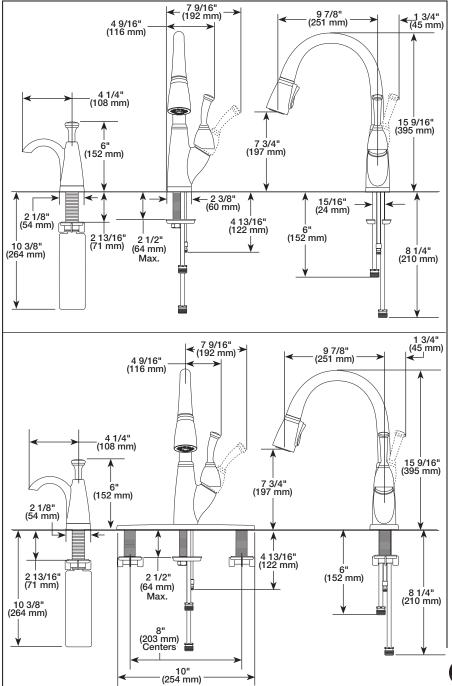

# **O**DELTA.

### KITCHEN FAUCETS

- Allora<sup>™</sup> Pull-Down Collection
- Single Handle Deck Mount
- Single, 2 or 3 Hole Sink Applications
- Optional Soap Dispenser

#### STANDARD SPECIFICATIONS:

- Solid brass fabricated body.
- Centermount or 8" (203 mm) centers with optional 10" (254 mm) escutcheon.
- 15 9/16" (395 mm) high, 9 7/8" (251 mm) long, spout swings 360°.
- Lever handle. Control mechanism is the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control shall return to neutral position when faucet is turned off.
- Touch-Clean<sup>®</sup> 2 function (stream/spray) sprayhead.
- Quick Snap<sup>®</sup> connect hoses.
- Pull-down wand operates in an aerated or spray mode via an ergonomic toggle diverter.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Magnetic docking system secures sprayer to spout.
- Integral double check valves in sprayer assembly.
- Integrated removable debris screen in sprayer assembly.
- Integral hose lead to aid installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring and 10" (254 mm) escutcheon to help alignment and aid installation.

Note: See 999\* for matching bar/prep.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1/ADA












Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.



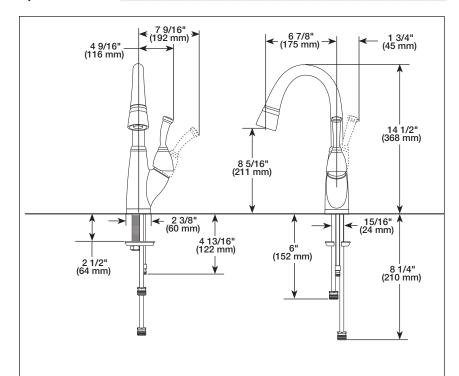



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

4.D.30

# **O**DELTA.

# BAR / PREP SINK FAUCETS

- Allora<sup>™</sup> Collection
- Single Handle Deck Mount Pull-Down
- Single or 2 Hole Sink Applications
- Optional Soap Dispenser

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 14 1/2" (368 mm) high, 6 7/8" (175 mm) long, spout swings 360°.
- Lever handle. Control mechanism is the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control shall return to neutral position when faucet is turned off.
- Single function spray head.
- Quick connect hoses.
- Magnetic docking system secures sprayer to spout.
- Red/Blue graphics on handle button to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Integral hose lead to aide installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring to help alignment and aid installation.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


ASME A112.18.1/CSA B125.1
Indicates ADA compliance to ICC/ANSI A117.1











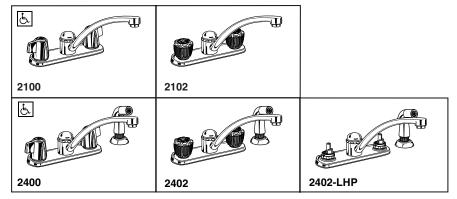

**Specific Features:** 

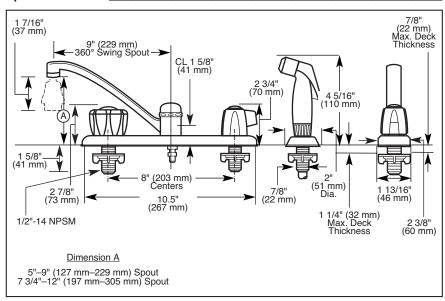

### Available LHP Handle Options Specify Finish

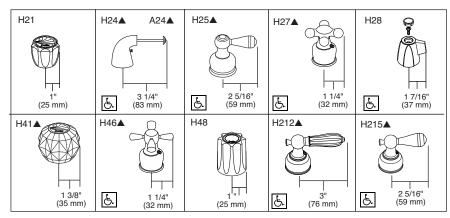

#### **Available LHP Handle Accent Options**



# **O**DELTA.

### KITCHEN FAUCETS

- Classic Series
- Two Handle Deck Mount
- 3 and 4 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 8" (203 mm) centers.
- 9" (229 mm) long spout swings 360°.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male inlet shanks.
- Models 2400, 2402 and 2402-LHP Series with spray attachment have anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose installation on models 2400, 2402 and 2402-LHP series.

#### **WARRANTY**

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- NSF 61

Indicates ADA compliance to ICC/ANSI A117.1

- IAPMO Listed
- CSA Certified













**Specific Features:** 

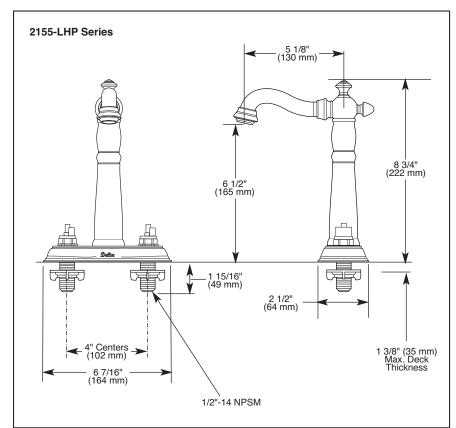

### Available LHP Handle Options ▲ Specify Finish





### BAR FAUCETS

- Victorian® Series
- Two Handle Deck Mount
- 2 or 3 Hole Sink Applications
- 4" Centerset

#### STANDARD SPECIFICATIONS:

- Two handle bar deck faucets for exposed mounting on two or three hole sinks.
- Solid brass fabricated body.
- 4" (102 mm) centerset.
- 5 1/8" (130 mm) long, 8 3/4" (222 mm) overall height, 6 1/2" (165 mm) outlet height, spout swings 360°.
- LHP-Less Handle Program.
- Hot and cold stems are interchangeable.
- 1/4 Turn stops
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male inlet shanks.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- NSF 61
- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified













**Specific Features:** 

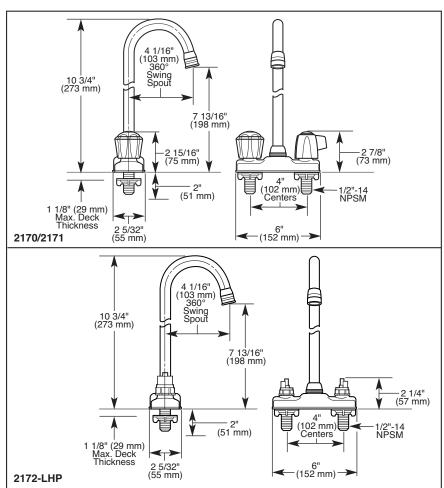

#### Available LHP Handle Options Specify Finish

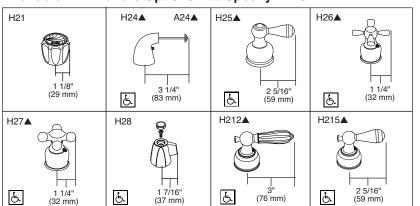

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### BAR & PREP SINK FAUCETS

- Classic Series
- Two Handle Deck Mount
- 2 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Two handle deck faucets for exposed mounting on 2 hole sinks.
- Solid brass fabricated body.
- 4" (102 mm) Centerset.
- 4 1/16" (103 mm) long, 10 3/4" (273 mm) high spout swings 360°.
- LHP Less handle program.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male shanks.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified








#### **Available LHP Handle Accent Options**






55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2007 Masco Corporation of Indiana


DSP-K-2170 Rev. D 4.D.33

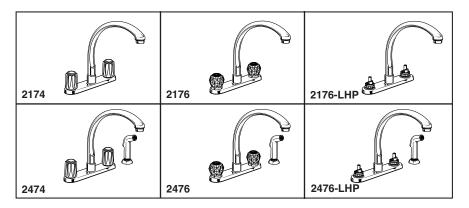

Specific Features: \_

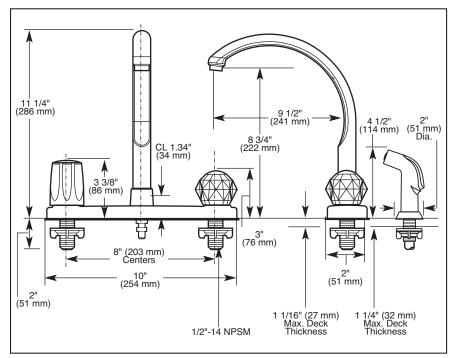

### Available LHP Handle Options Specify Finish

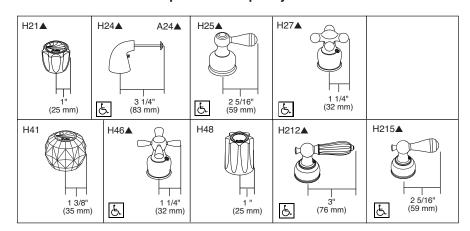

#### **Available LHP Handle Accent Options**



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.
4.D.34

# **O**DELTA.

### KITCHEN FAUCETS

- Waterfall® Series
- Two Handle Deck Mount
- 3 and 4 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 8" (203 mm) centers.
- 9 1/2" (241 mm) long, 11 1/4" (286 mm) high spout swings 360°.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male inlet shanks.
- Models 2474, 2476 and 2476-LHP Series with spray attachment have anti-siphon device as integral part of valve body.
- Quick Snap® vegetable sprayer hose installation on models 2474, 2476, and 2476-LHP series.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified












Specific Features:

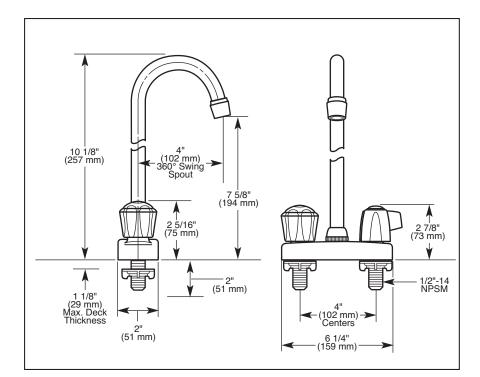

### 

### **BAR & PREP** SINK FAUCETS

- Classic Series
- Two Handle Deck Mount
- 2 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Two handle deck faucets for exposed mounting on 2 hole sinks.
- Solid brass fabricated body.
- 4" (102 mm) centerset.
- 4" (102 mm) long, 10 1/8" (257 mm) high spout swings 360°.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male shanks.


#### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed CSA Certified














Specific Features: \_

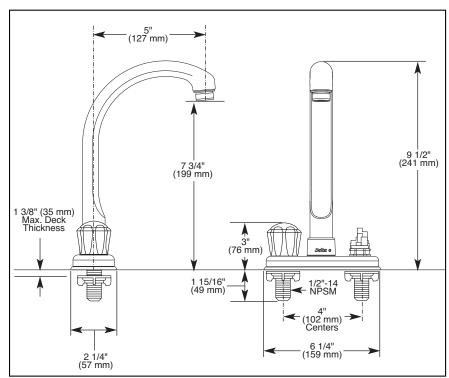

### Available LHP Handle Options ▲ Specify Finish

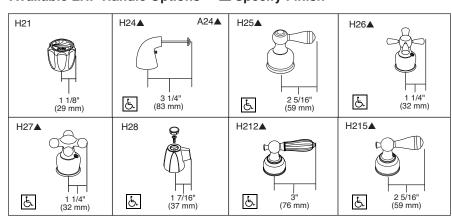

#### **Available LHP Handle Accent Options**



4.D.36

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA.

### BAR & PREP SINK FAUCETS

- Waterfall® Series
- Two Handle Deck Mount
- Two Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Two handle deck faucets for mounting on two hole sinks.
- Solid fabricated brass body.
- 4" (102 mm) centerset.
- 5" (127 mm) long, 9 1/2" (241 mm) high spout swings 360°.
- LHP Less Handle Program.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- 1/4 Turn handle stops on LHP models (optional).
- All operating parts shall be replaceable from the top.
- 1/2"-14 NPSM threaded male inlet shanks.

#### **WARRANTY**


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- ICC/ANSI ATT/
- CSA Certified













Submitted Model No.: \_\_\_\_\_\_\_Specific Features: \_\_\_\_\_

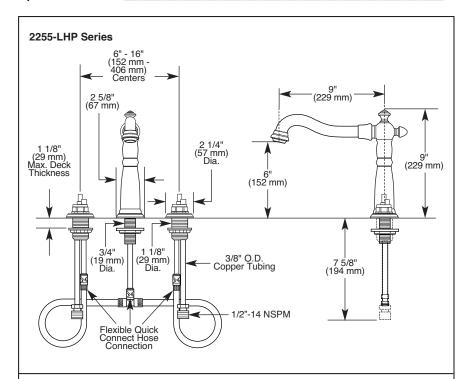

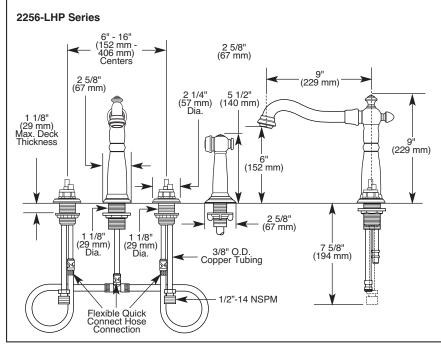

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

# **O**DELTA

### KITCHEN FAUCETS

- Victorian® Series
- Two Handle Widespread Deck Mount
- 3 and 4 Hole Sink Applications

#### **STANDARD SPECIFICATIONS:**

- Two handle kitchen deck faucets for exposed mounting on three and four hole sinks.
- Solid brass fabricated end valve and spout bodies.
- Widespread 6" (152 mm) to 16" (406 mm) centers.
- 9" (229 mm) long, 9" (229 mm) overall height, 6" (152mm) outlet height, spout swings 360°.
- Hot and cold stems are interchangeable.
- LHP Less Handle Program.
- 1/4 turn stops.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable nonmetallic seats operating in stainless steel lined sockets.
- Models 2256-LHP Series with spray attachment have antisiphon device as integral part of valve body.
- Quick Snap® hose and handle base installation.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Standard mounting deck thickness 1 1/8" can be extended 1" with RP37775 thick tile mounting kit.

#### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- NSF 61
- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified








#### Available LHP Handle Options **A**Specify Finish






55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2007 Masco Corporation of Indiana


DSP-K-2255-LHP Rev. A 4.D.37



**Specific Features:** 

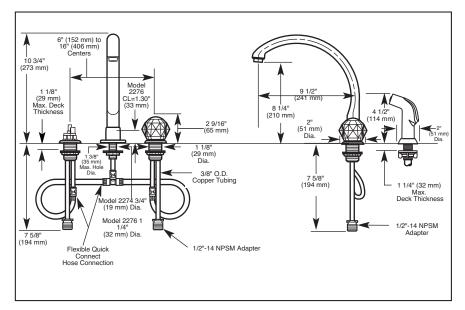

#### Available LHP Handle Options Specify Finish

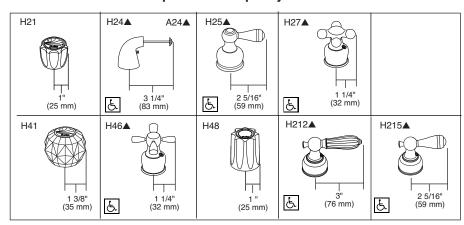

#### Available LHP Handle Accent Options



# **⚠** DELTA.

### KITCHEN FAUCETS

- Waterfall® Series
- Two Handle Widespread Deck Mount
- 3 and 4 Hole Sink Applications

#### STANDARD SPECIFICATIONS:

- Solid brass fabricated end valve and spout bodies.
- Widespread 6" (152 mm) to 16" (406 mm) centers.
- 9 1/2" (241 mm) long, 10 3/4" (273 mm) high spout swings 360°.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Quick Snap® hose installation.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Models 2276-WF and 2276-LHP Series with spray attachment have anti-siphon device as integral part of valve body.

#### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

#### **COMPLIES WITH:**


- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to
- Indicates / D/ Co.
- IAPMO Listed
- CSA Certified












**Specific Features:** 

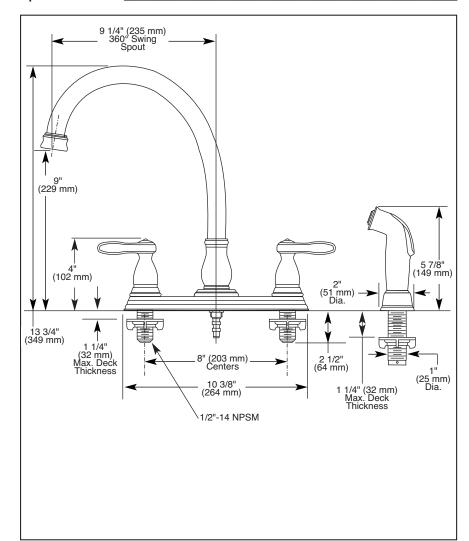

# **O**DELTA.

### KITCHEN FAUCETS

- Orleans<sup>™</sup> Series
- Two Handle Deck Mount
- 4 Hole Sink Application

#### **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body
- 8" (203 mm) centers.
- 9 1/4" (235 mm) long, 13 3/4" (349mm) high spout swings 360°.
- Metal lever handles with 1/4" turn stops.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2" I.P.S. threaded male inlet shanks.
- Model 2457 Series with spray attachment has antisiphon device as integral part of valve body.

#### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
  - IAPMO Listed
- CSA Certified





